

試驗報告

報告號碼: HV-09-00438X

頁數: 1 OF 1

日期: 98 年 02 月 13 日

委託單位: 瑩芳實業股份有限公司
 樣品名稱: EPE FOAM 聚乙烯發泡
 樣品型號: L 級
 送樣日期: 98 年 02 月 04 日
 試驗日期: 98 年 02 月 04 日~98 年 02 月 11 日
 備註: 以上資料由送驗人員提供(試驗日期除外)

試驗結果:

試驗項目	試驗方法	試驗結果
密度(kg/m^3)(在 23°C 時)	JIS K6767(1999)	29.4
25%抗壓強度(kgf/cm^2)	參考 JIS K6767(1999)	0.30
抗拉強度(kgf/cm^2)	參考 JIS K6767(1999)	3.19
伸長率(%)	(V=500 mm/min)	123
壓縮永久變形(%) (25%變形率, 22 小時)	參考 JIS K6767(1999)	6.9
吸水率(g/cm^3)(浸漬溫度 23°C, 24 小時)	CNS 10487(1988)	0.008

----- o o o -----

張繼文
 報告簽署人

規範要求值僅供參考, 合格之判定以委託單位實際要求為準。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明, 此報告結果僅對測試之樣品負責。本報告未經本公司書面許可, 不可部份複製。

This Test Report is issued by the Company under its General Conditions of Service printed overleaf or available on request and accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

TW 7076109

Laboratory Testing · ISO Certification · Inspection

No.35, Wu Chyuan Road

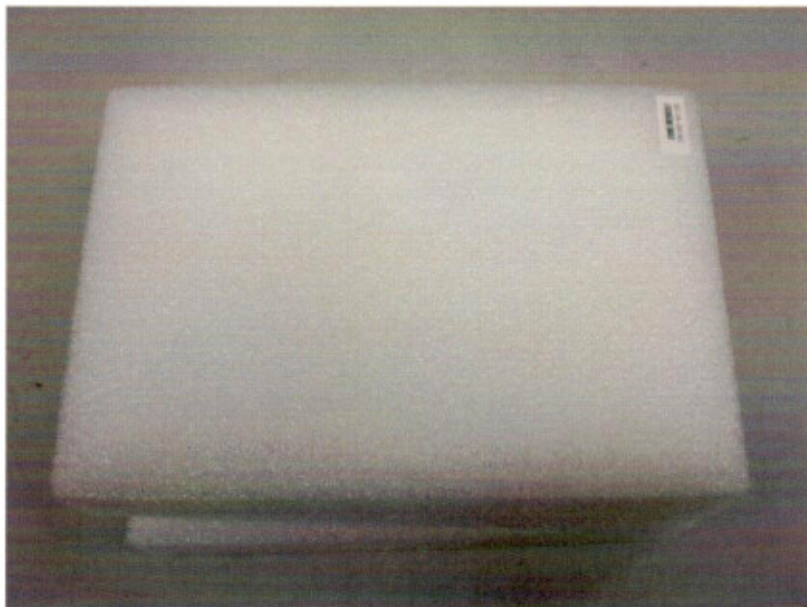
WuKu Industrial Zone,

Taipei County, Taiwan

Tel: (886-2) 2298-3355

Fax: (886-2)2298-3880

1/1

REPORT NO.: HV-09-00438X

樣品照片